

## Option II

# WiFi Configuration


Via Laptop

### I 1. Preparation

- 1.1 Power WiFi inverter (or EzLogger WiFi) on.
- 1.2 If you are configuring WiFi inverter, make sure the yellow led on front cover is flickering. Otherwise please set the communication to WiFi according to user manual of inverter at first.
- 1.3 Power WiFi router on.
- 1.4 Switch on the WiFi of laptop.

### II 2. Connect WiFi to 'GoodWe-HF'


- 2.1 Search WiFi network and connect "GoodWe-HF".
- 2.2 Browse website: <http://10.10.100.254>

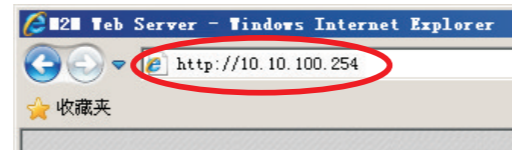

- 2.3 Enter User name:"admin", Password:"admin"




### V 3.3 Change Password

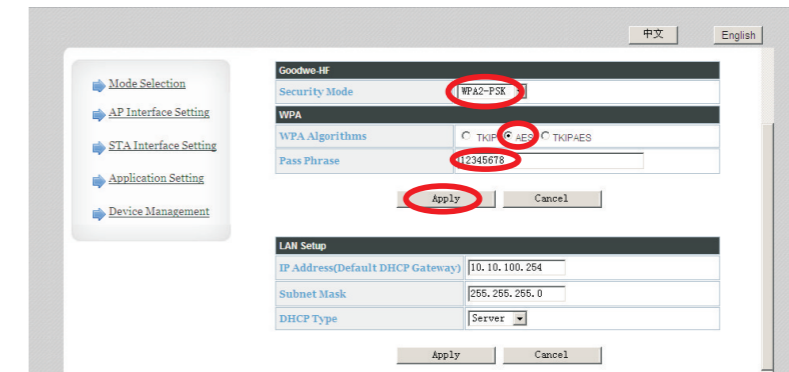


### VI 4. Choose WiFi signal of your own router by "STA Interface Setting"

- 4.1 Click 'Search' button and choose your own WiFi connection point

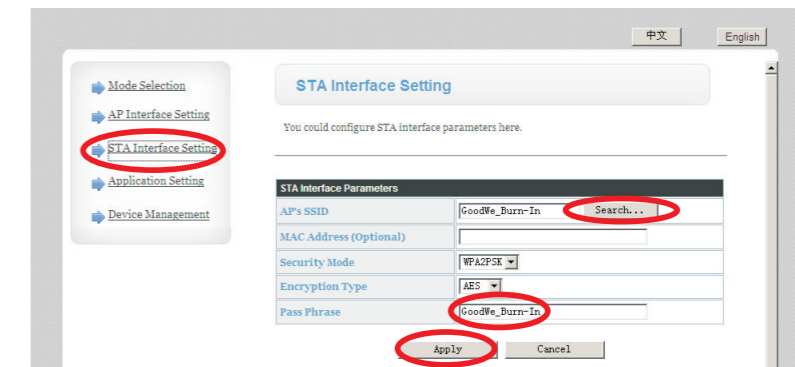


### III 3. Configure security setting by "AP Interface Setting"

- 3.1 Change Network name

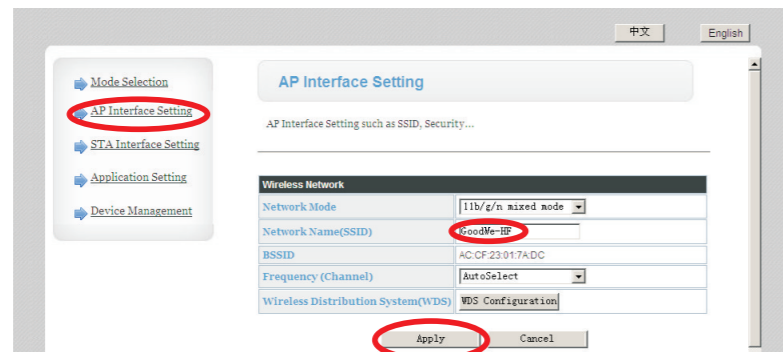


### IV 3.2 Change Security Mode

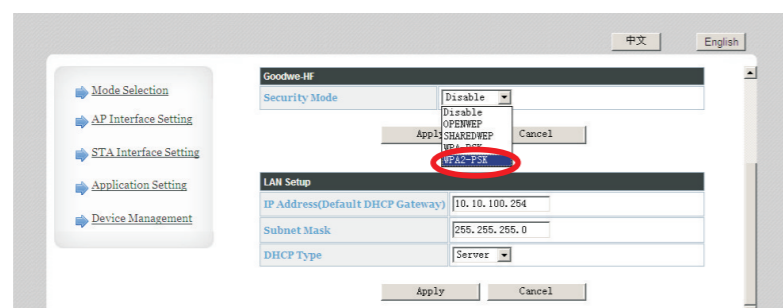

### VII 5. Restart WiFi module by "Device Management"

- 5.1 Restart WiFi module

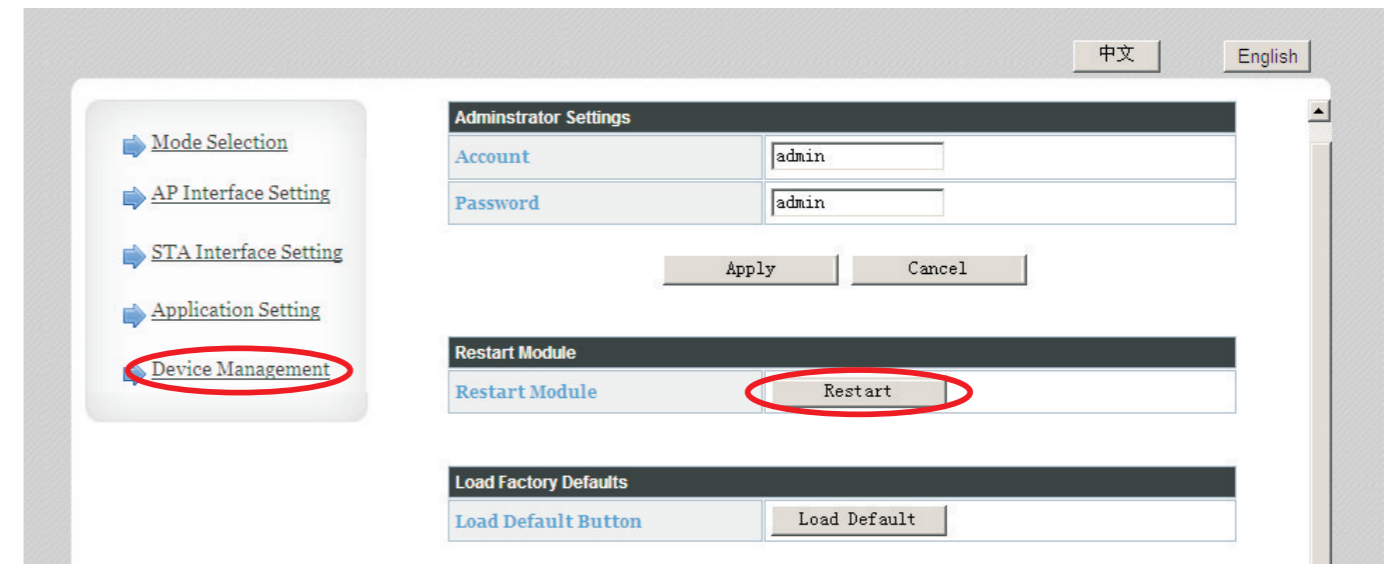

6. Reconnect laptop with local router, browse <http://www.goodwe-power.com> to register and create your PV station.